


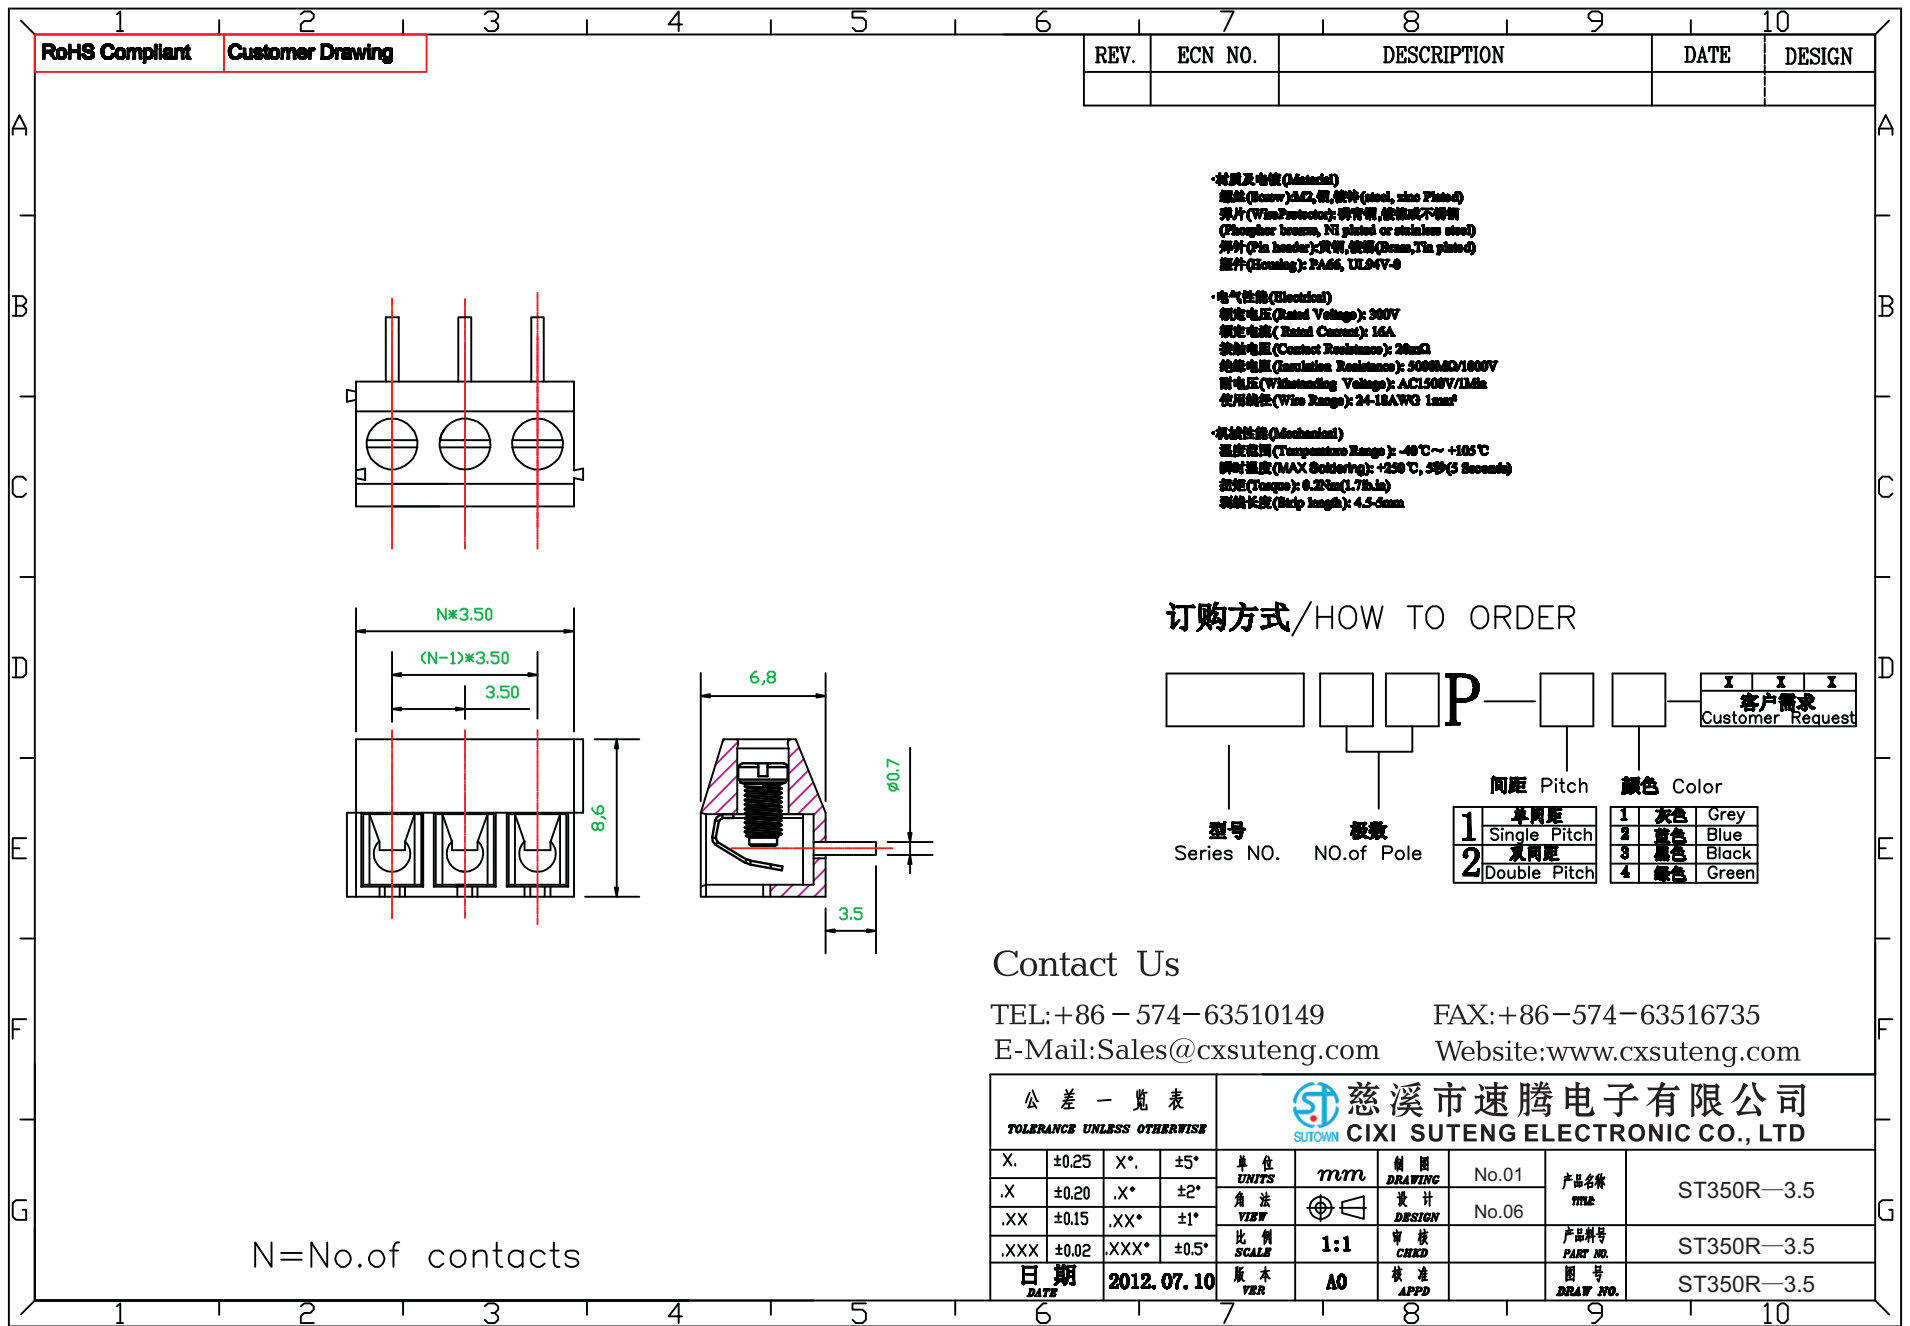

RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

·材料及电镀 (Material)
线材 (Wire): 铜, 镀锡 (copper, zinc plated)
弹片 (Wire Protector): 磷青铜, 镀锡或不镀锡
(Phosphor bronze, NI plated or stainless steel)
弹针 (Pin holder): 黄铜, 镀锡 (Brass, Tin plated)
配件 (Accessories): PA66, UL94V-0

·电气性能 (Electrical)
额定电压 (Rated Voltage): 300V
额定电流 (Rated Current): 16A
接触电阻 (Contact Resistance): 20mΩ
绝缘电阻 (Insulation Resistance): 5000MΩ/1000V
耐电压 (Withstanding Voltage): AC1500V/1min
使用线径 (Wire Range): 24-18AWG 1mm²

·机械性能 (Mechanical)
温度范围 (Temperature Range): -40℃~+105℃
瞬时温度 (MAX Soldering): +250℃, 5秒 (5 Seconds)
扭矩 (Torque): 0.2Nm (1.7lb.in)
引脚长度 (Pin length): 4.5-6mm

订购方式/HOW TO ORDER

Diagram showing the ordering format: [Series NO.] [NO. of Pole] P [Pitch] [Color] [Customer Request]

型号 Series NO. 极数 NO. of Pole 间距 Pitch 颜色 Color

1	单间距 Single Pitch	1	灰色 Grey
2	双间距 Double Pitch	2	蓝色 Blue
3		3	黑色 Black
4		4	绿色 Green

Contact Us

TEL: +86 - 574 - 63510149 FAX: +86 - 574 - 63516735
E-Mail: Sales@cxsuteng.com Website: www.cxsuteng.com

公差一览表 TOLERANCE UNLESS OTHERWISE				慈溪市速腾电子有限公司 CIXI SUTENG ELECTRONIC CO., LTD					
X.	±0.25	X°	±5°	单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	ST350R—3.5
.X	±0.20	.X°	±2°	角法 VIEW	⊕	设计 DESIGN	No.06	产品料号 PART NO.	ST350R—3.5
.XX	±0.15	.XX°	±1°	比例 SCALE	1:1	审核 CHECK		图号 DRAW NO.	ST350R—3.5
.XXX	±0.02	.XXX°	±0.5°	日期 DATE	2012.07.10	版本 APPD	AO		

N=No. of contacts