


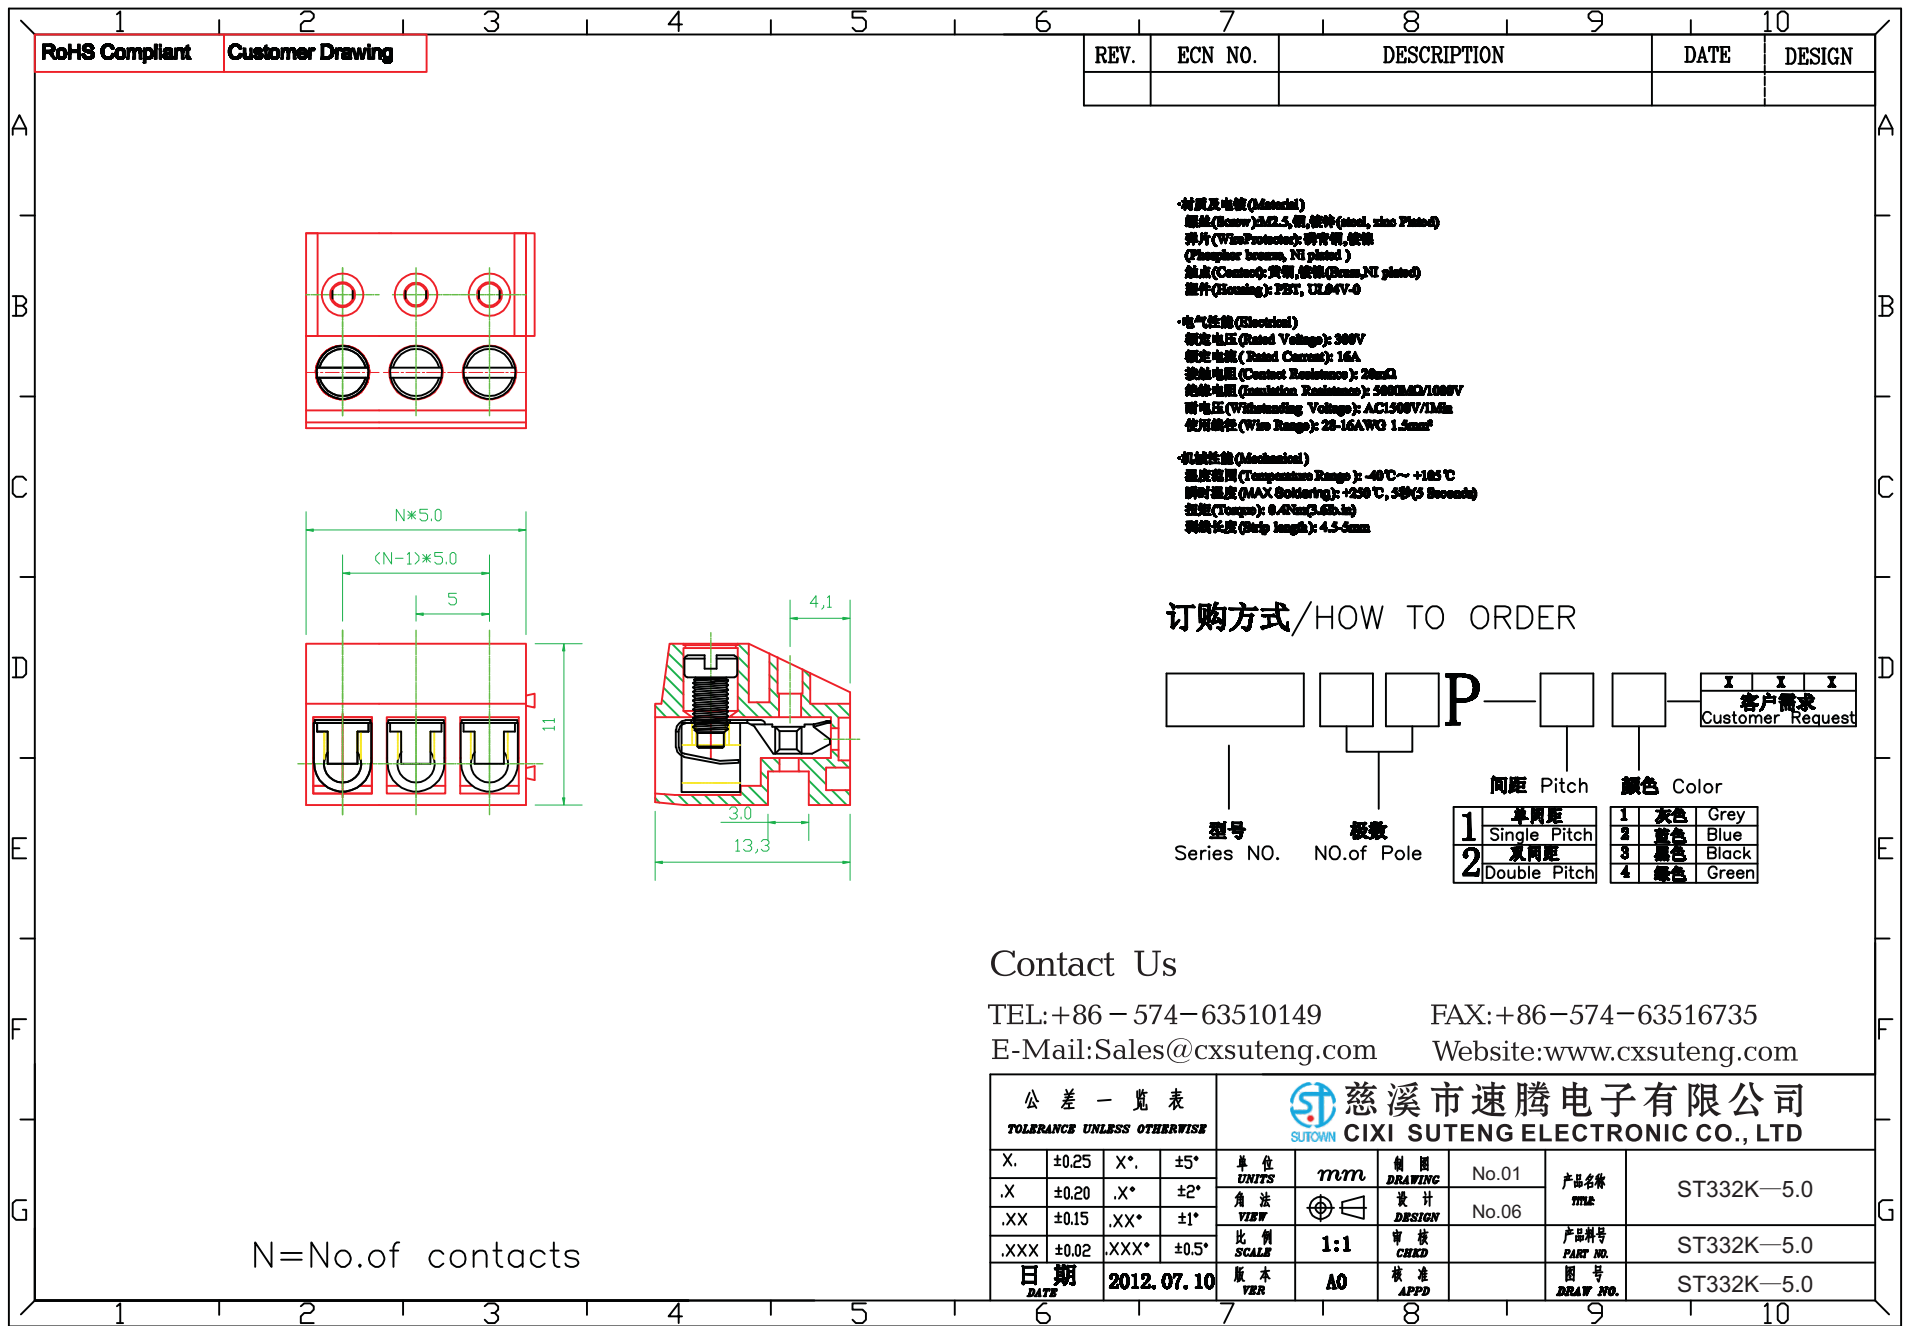

RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

•材料及电镀(Material)
铜丝(Bussor): AWG 2.5, 铜, 镀锡 (copper, zinc Plated)
弹片 (Wire/Protective): 铜片, 镀锡 (Phosphor bronze, NI plated)
触点 (Contact): 铜片, 镀锡 (Copper, NI plated)
零件 (Housing): PBT, UL94V-0

•电气性能(Electrical)
额定电压 (Rated Voltage): 300V
额定电流 (Rated Current): 16A
接触电阻 (Contact Resistance): 20mΩ
绝缘电阻 (Insulation Resistance): 500MΩ/1000V
耐压 (Withstanding Voltage): AC1500V/1Min
使用温度 (Use Range): 20-160°C 1.5mm²

•机械性能(Mechanical)
温度范围 (Temperature Range): -40°C ~ +125°C
焊接温度 (MAX Soldering): +250°C, 5秒 (5 Seconds)
长度 (Length): 6.4mm (0.25in)
引脚长度 (Strip Length): 4.5-5mm

订购方式/HOW TO ORDER

□

□

□

P

□

□

X	X	X
客户需求		
Customer Request		

型号 Series NO.

极数 NO.of Pole

间距 Pitch
1 单间距 Single Pitch
2 双间距 Double Pitch

颜色 Color
1 灰色 Grey
2 蓝色 Blue
3 黑色 Black
4 绿色 Green

Contact Us

TEL: +86 - 574 - 63510149 FAX: +86 - 574 - 63516735
E-Mail: Sales@cxsuteng.com Website: www.cxsuteng.com

公差一览表 TOLERANCE UNLESS OTHERWISE				慈溪市速腾电子有限公司 CIXI SUTENG ELECTRONIC CO., LTD					
X.	±0.25	X*.	±5°	单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	ST332K—5.0
.X	±0.20	.X*.	±2°	角法 VIEW	⊕	设计 DESIGN	No.06	产品型号 PART NO.	ST332K—5.0
.XX	±0.15	.XX*.	±1°	比例 SCALE	1:1	审核 CHECK		图号 DRAW NO.	ST332K—5.0
.XXX	±0.02	.XXX*.	±0.5°	日期 DATE	2012.07.10	版本 APPD			